
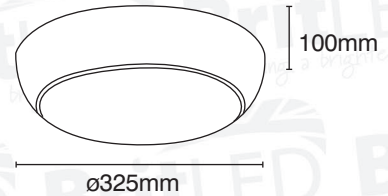


# IP54 LED FLUSH CEILING / WALL LIGHT

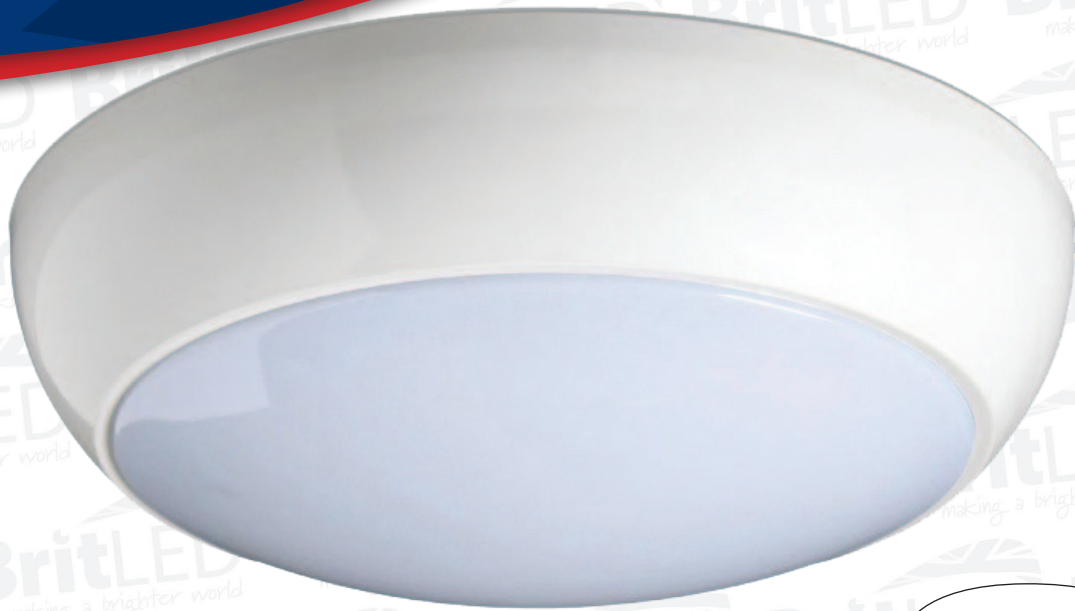

## Features

- High Lumen efficiency
- Colour rendering index >80
- Long lifespan >30,000 hours
- SMD5050 LED source
- Constant current driver
- Fire resistant frosted PC diffuser
- Fire resistant white PC base
- Designed and manufactured to comply with CE / ROHS IP54 protection

### MOTION SENSOR

- 5.8GHz CW electric wave sensor
- Time setting: 14 sec to 10 min
- Detection range: 1-10 meters
- Light control: 10-2000 LUX
- Installation height: 2.5-3.5 meters

### EMERGENCY

- 12V 1600mAH Lithium battery

Model	Main Function	Input (V)	Power (W)	LED Type	CCT (K)	Lumen (LM)	Dimmable	Power Factor	Beam Angle
BLR1335A-15W-WW	ON/OFF	AC100-240V 50/60Hz	15W	100x0.2W SMD2835	3000K	900	NON	>0.8	180°
BLR1335A-15W-NW					4200K	1000			
BLR1335A-15W-CW					6000K	1150			
BLR1335A-15WSM-WW	Motion Sensor	AC100-240V 50/60Hz	16W	100x0.2W SMD2835	3000K	900	NON	>0.8	180°
BLR1335A-15WSM-NW					4200K	1000			
BLR1335A-15WSM-CW					6000K	1150			
BLR1335A-15WDM-WW	30% Dimmable	AC100-240V 50/60Hz	5W 15W	100x0.2W SMD2835	3000K	900	30% Standing 100% Sensor	>0.8	180°
BLR1335A-15WDM-NW					4200K	1000			
BLR1335A-15WDM-CW					6000K	1150			
BLR1335A-15WBE-WW	Emergency	AC100-240V 50/60Hz	17W	100x0.2W SMD2835	3000K	900	NON	>0.8	180°
BLR1335A-15WBE-NW					4200K	1000			
BLR1335A-15WBE-CW					6000K	1150			
BLR1335A-15WBESM-WW	Emergency + 30% Dimmable	AC100-240V 50/60Hz	5W 18W	100x0.2W SMD2835	3000K	900	30% Standing 100% Sensor	>0.8	180°
BLR1335A-15WBESM-NW					4200K	1000			
BLR1335A-15WBESM-CW					6000K	1150			