


CREE LED Floodlight

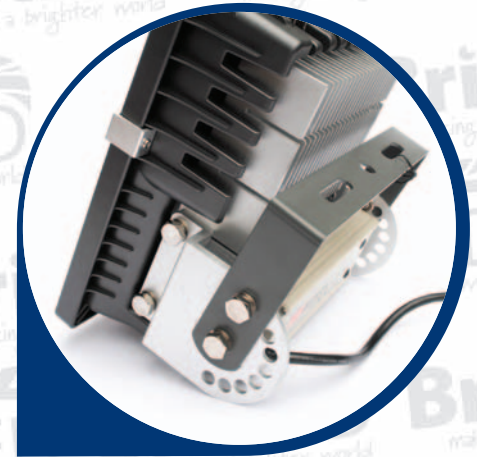

Features

Our Brit Led range of Cree Led floodlights has been developed to the highest standard using the best available components. We manufacture the Cree Led Floodlight to customer specifications with choice of colour temperature and lumen power. The floodlights have Meanwell drivers as standard with a five year British warranty.

Input Voltage:	230-240V AC	Material (Shell):	Aluminium
Driver:	Meanwell	Diffuser:	Glass
Start Up Load:	350MA	Modifications Available:	Diffused
Led Type:	CREE XP-E	IP Rating:	65
Wattages:	80w to 250w	Power factor	0.90
Average Lumens Per Watt:	110 Lm/w	Frequency	50/60Hz
Product Life:	50,000Hrs	CRI	80
Component Warranty:	5 years		

Model	Input (V)	Power (W)	LED Type	CCT (K)	Lumen (LM)	Power Factor	Beam Angle
BLE-FL-40w	AC100-240V 50/60Hz	40W	CREE XP-E	4000K / 5000K	3,900	>0.9	180°
BLE-FL-60w	AC100-240V 50/60Hz	60W	CREE XP-E	4000K / 5000K	6,500	>0.9	180°
BLE-FL-80w	AC100-240V 50/60Hz	80W	CREE XP-E	4000K / 5000K	7,600	>0.9	180°
BLE-FL-120w	AC100-240V 50/60Hz	120W	CREE XP-E	4000K / 5000K	12,000	>0.9	180°
BLE-FL-140w	AC100-240V 50/60Hz	140W	CREE XP-E	4000K / 5000K	15,600	>0.9	180°
BLE-FL-170w	AC100-240V 50/60Hz	170W	CREE XP-E	4000K / 5000K	19,000	>0.9	180°
BLE-FL-240w	AC100-240V 50/60Hz	240W	CREE XP-E	4000K / 5000K	25,480	>0.9	180°